





STAUNCH
MACHINERY
SINCE 1979

STAUNCH Dumper concrete Mixer RM STMD500

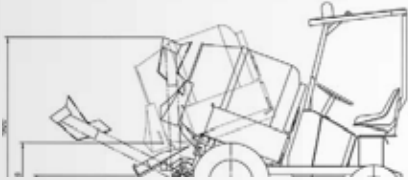

Technical Data

STMD500

Mixing capacity		500 L
Drum	loading system	Self-loading arms. Rigid 60 liter bucket, with gravity opening to opening to optimise dosing.
	Discharge system	By counter-rotation and elevation, through a chute with a discharge arc of 1900 and a reach of 790mm.
Engine	Diesel	HATZ Supra Diesel
	Power (KW/CV)	11,3/15,35 (DIN 70020)
	N.of cylinders	1
	Cooling	Air
Traction		4x2 / 4x4 front axle
Transmission		Mechanical 4 forward gears and 4 reverse gears. Rigid front drive axle and oscillating rear drive steering.
Unladen weight (Kg)		1500
Gradeability		25%
Max. speed (km/h)		22
Starting		Electric
Tyres		7.50-16(8 PR) front / 145 R-13 (LS) rear
Steering		Hydraulic. working pressure: 60 bar.
External Turning Radius (mm)		3470
Tank capacities(l)	Fuel	13,5
	Hydraulic	16,5
	Water	-
Service Brake		Hydraulic front axle assembly
Parking Brake		Mechanical on front axle assembly
Hydraulic Circuit		8 cc gear pump. Working pressure 120 bar.
Standard Equipment		Lockable engine compartment
Optional Equipment		ROPS/FOPS protective roof with rotating lamp
		Front windscreen with windscreen wiper
		1047 l hopper with 60 l self-loading bucket.
		Electrical equipment
		Rear tyres: 155 SR 13)LS), 5.00 -12(4x4) (TT) 4PR 6.5/80-12 (4x4)(TT), 4PR.